

X-WEAVE

Exterior Solar Screen



TEXTSTYLE



X-WEAVE


Perfect for any application, X-Weave in both 5% and 10% openness offers privacy and sun protection while enhancing the look of your outdoor entertainment area.

Made with the outdoors in mind, X-Weave is a sturdy 2x2 weave that makes work-ability and versatility two of its strongest characteristics, allowing you to master outdoor living and comfort. This insect resistant exterior fabric collection pairs beautifully and durably with our Zipscreen Exterior system.


FEATURES

- For Exterior and Interior use
- Insect Resistant
- Available in 5% and 10% Openness Factor
- 126" Roll Width and Railroadable
- Available in 8 colors
- NFPA 701 Fire Classification
- 30% Polyester, 70% PVC
- Tear Strength - Warp 330N, Weft 210N
- 10 Year Warranty

COLORS

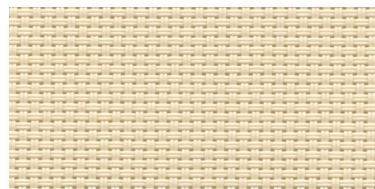


SAND

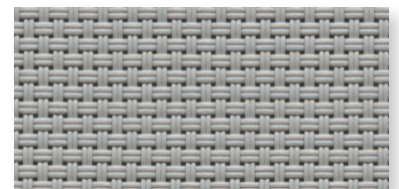


STONE GRAY



GRAPHITE

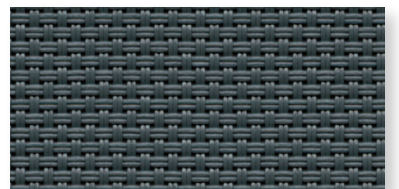


SLATE

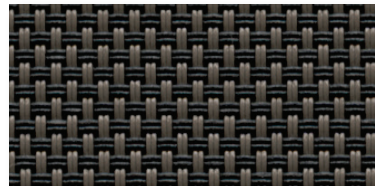


MAHOGANY



ONYX

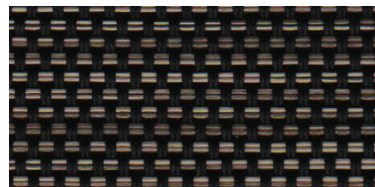

SUNSET

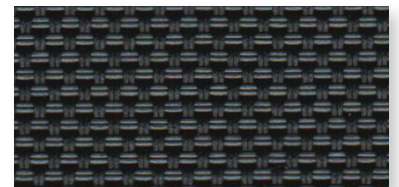

OBSIDIAN

Bringing Fabrics to Life


USA | AUSTRALIA | EUROPE textstyle.com

 **ROLLEASE
ACMEDA**

© 2022Textstyle

X-WEAVE

Exterior Solar Screen



TEXTSTYLE

SPECIFICATIONS

	5%	10%
Composition	30% Polyester, 70% PVC	
Openness Factor	Average 5%	Average 10%
Weight	15.63 oz/yd ² (530g/m ²)	13.86ozyd2 (470g/m2)
Thickness	0.032in (.82mm)	0.027in (.68mm)
Light Fastness	≥ 5 (Blue wool scale)	
Average length	22yd/roll (20m)	
Width	126" (3.2m)	
Cutting	Crush, Cold, and Ultrasonic	
Welding	248°F (120°C) to 284°F (140°C), test first	
Railroadable	Yes, but should be done for all shades in the room to avoid visual variation	
Cleaning	Wipe clean with warm soapy water and damp cloth	
Environmental Standards	GREENGUARD Gold, OEKO-TEX Standard 100, ISO 14001	
Fungal/Bacterial Resistance	ASTM G21, ASTM E2149	
Tensile Strength	Warp 2460N per 1.97" Weft 1690N per 1.97"	
Tearing Strength	Warp 330N Weft 210N	
Fire Classifications	NFPA 701	



Bringing Fabrics to Life


USA | AUSTRALIA | EUROPE textstyle.com

 **ROLLEASE
ACMEDA**

© 2022Textstyle

X-WEAVE

Exterior Solar Screen



TEXTSTYLE

THERMAL AND OPTICAL FACTORS

COLOR		THERMAL FACTORS			OPITCAL FACTORS		FABRIC & GLASS	
		Rs	As	Ts	Rv	Tv	SHGC% Improvements	SHGC
5%	Graphite	14	72	14	14	14	20	0.36
	Mahogany	7	84	9	7	8	34	0.38
	Obsidian	6	86	8	5	9	30	0.38
	Onyx	3	90	7	4	7	26	0.38
	Sand	51	32	17	52	13	15	0.27
	Slate	8	83	9	8	8	20	0.37
	Stone gray	30	59	11	30	9	17	0.32
	Sunset	11	80	9	11	9	21	0.36
10%	Graphite	15	65	20	15	19	20	0.39
	Mahogany	7	80	13	7	13	21	0.39
	Obsidian	7	80	13	7	12	20	0.39
	Onyx	3	84	13	4	13	20	0.39
	Sand	47	31	22	49	19	26	0.31
	Slate	8	78	14	8	14	20	0.39
	Stone gray	28	58	14	29	13	18	0.33
	Sunset	12	73	15	12	14	20	0.38



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
Tested for harmful substances.
www.oeko-tex.com/standard100



FR



LEAD FREE



FORMALDEHYDE
FREE



PHTHALATE
FREE



FRAGRANCE
FREE



ANTI-
BACTERIAL



ENERGY
SAVING

Bringing Fabrics to Life

USA | AUSTRALIA | EUROPE textstyle.com

© Rollease Acmeda Inc

**ROLLEASE
ACMEDA**

©2022 textstyle